



AVANT Traffic Barriers




TECHNICAL DATA

VERSION	MOTORS	LENGHT (max.)	HEIGHT (max.)	OPENING TIME (sec.)	OPERATING TEMPERATURE	PAINTING	CATEGORY
 RESIDENTIAL INDUSTRIAL	 1	 10		 5 ÷ 12	 -20° +65°	 LIQUID	 ENTRY LEVEL

OPTIONAL



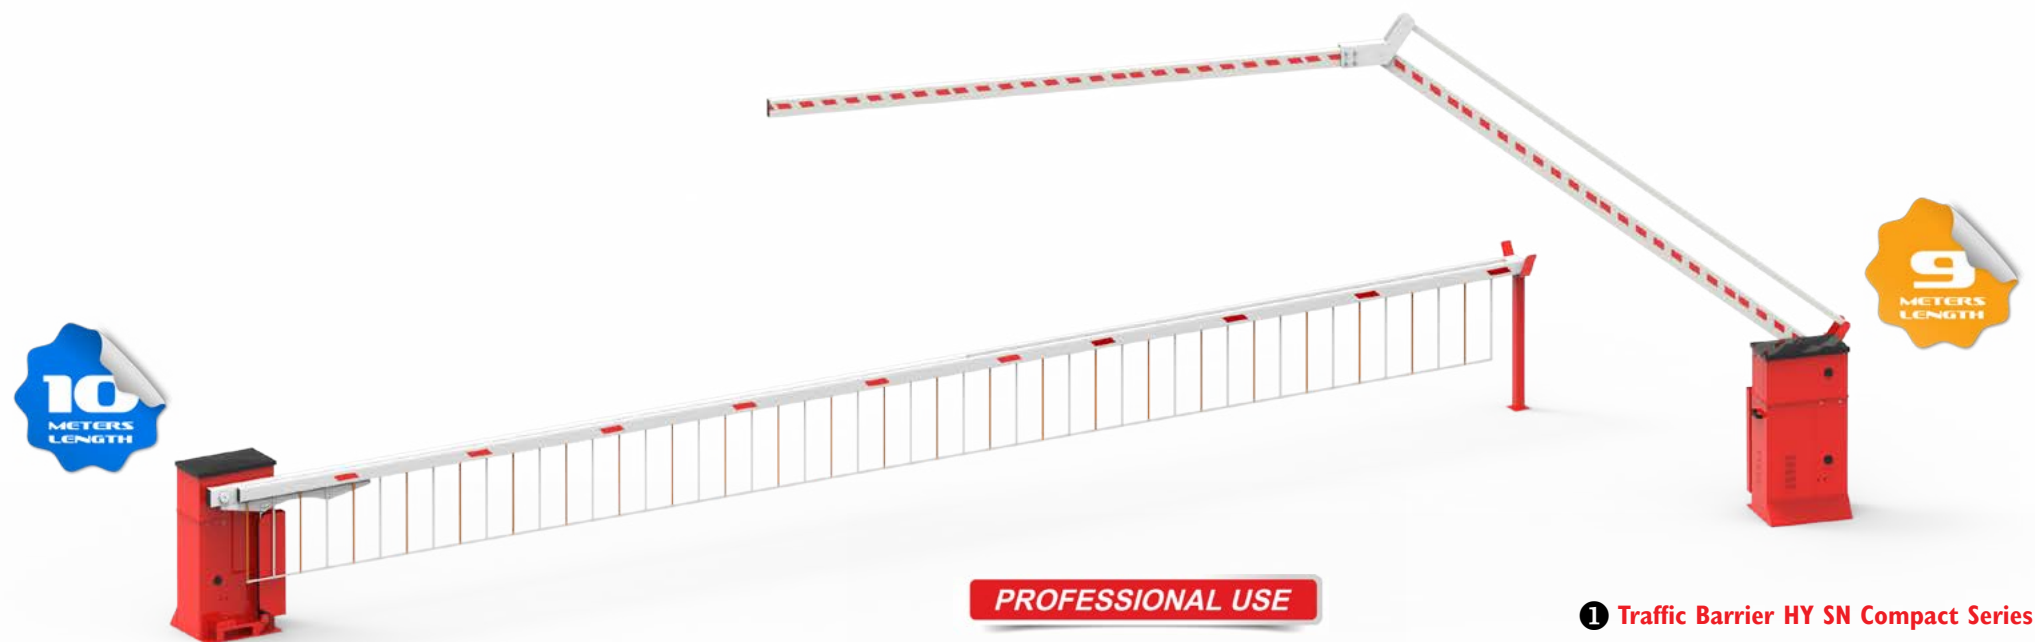

1 Traffic Barrier HY Compact Series

1 Traffic Barrier HY SN Compact Series



2 Traffic Barrier EM STD Series

RESIDENTIAL USE

3 Traffic Barrier EM PRO Series

PROFESSIONAL USE

1 TRAFFIC BARRIER HY COMPACT SERIES SPECIFICATIONS:

Electric Motor - Elektromotor Moteur électrique - Motore elettrico	1,1 KW - 230 V
Motorization - Motorisierung Motorisation - Motorizzazione	Hydraulic with high pressure power unit
Using Frequency - Betrieb Fréquence d'utilisation - Frequenza di utilizzo	80% highly intensive
Working Temperature - Betriebstemperatur Temp. de fonctionnement - Temp. di funzionamento	From -30°C to +60°C
Protection Degree - Schutzart Degré de protection - Grado di protezione	IP55
Length - Länge Longueur - Lunghezza	2,50 - 10,00 m
Opening time - Öffnungszeit Temps d'ouverture - Tempo di apertura	~ 12 sec.

2 TRAFFIC BARRIER EM STD SERIES SPECIFICATIONS:

Electric Motor - Elektromotor Moteur électrique - Motore elettrico	1-phase 230 Vac ±10%, 50-60 Hz
Motorization - Motorisierung Motorisation - Motorizzazione	Electromechanical
Using Frequency - Betrieb Fréquence d'utilisation - Frequenza di utilizzo	1.000 op./day
Working Temperature - Betriebstemperatur Temp. de fonctionnement - Temp. di funzionamento	From -20°C to +60°C
Protection Degree - Schutzart Degré de protection - Grado di protezione	IP54
Length - Länge Longueur - Lunghezza	3,00 - 6,00 m
Opening time - Öffnungszeit Temps d'ouverture - Tempo di apertura	~ 5 sec.

3 TRAFFIC BARRIER EM PRO SERIES SPECIFICATIONS:

Electric Motor - Elektromotor Moteur électrique - Motore elettrico	1-phase 230 Vac ±10%, 50-60 Hz
Motorization - Motorisierung Motorisation - Motorizzazione	Electromechanical
Using Frequency - Betrieb Fréquence d'utilisation - Frequenza di utilizzo	10.000 op./day
Working Temperature - Betriebstemperatur Temp. de fonctionnement - Temp. di funzionamento	From -30°C to +60°C
Protection Degree - Schutzart Degré de protection - Grado di protezione	IP54
Length - Länge Longueur - Lunghezza	3,00 - 8,00 m
Opening time - Öffnungszeit Temps d'ouverture - Tempo di apertura	~ 7 sec.

